
# **Data Sanitization**





Smallest but Strongest!The highest power hides in a compact size

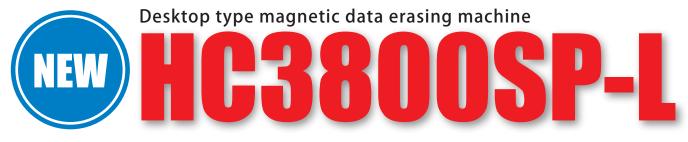

## re certificat ſ

Bar code reader scans HDD information for easy entry of erasure records into a database

# rasure log management s

The HC3800SP-L generates a magnetic field of 14000 Oe, the most powerful in its class. The world's first erasure log management system makes a database of erasure logs in the blink of an eye using a bar code reader. Issuance of erasure certificates makes this machine the most thorough assurance against information leakage.

#### Easy operation using LCD screen




Desktop type machine with numerous rarely found features World's first erasure log management system Incredible 14000 Oe magnetic field Erasure cetificates produced Shielded against leakage of magnetic fields (No danger to humans or other instruments) High density, vertically recorded drives OK! • Easy operation using an LCD screen. Compact size with carrying handles

\*Computer and bar code reader must be purchased separately. Microsoft Word and a printer are required in order to print erasure certificates.



www.orient-computer.co.jp www.orient-computer.com

## Erasure log management system reads bar codes on HDDs in the blink of an eye, makes a database of erasure records, and issues erasure certificates.

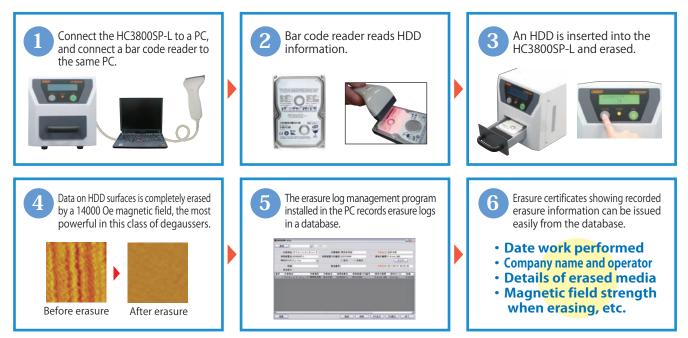

\*Computer and bar code reader must be purchased separately. Microsoft Word and a printer are required in order to print erasure certificates.

## The HC3800SP-L greatly improves work efficiency in data erasure management.











#### Specifications

Model no.	HC3800SP-L
Media handled	"3.5 inch hard drives including drives from servers, and any kind of magnetic recorded media"
Electrical charging time (per operation)	Abt 18 seconds/1 time
Data erasure time (per operation)	Abt 0.1 seconds
Magnetic field generated (Max)	1,117 kA/m (14,000 Oe)
Power requirement	DC100-240 V 50/60 Hz
Rated power consumption	80 W
Outer dimensions	236(W)×248(H)×480(D) mm
Dimensions of slot area	110(W)×45(H)×190(D) mm
Weight	約 22.9 kg
Operating environment	Temperature: 5 to 40°C / Humidity: up to 80% (non-condensing)
Accessories	Operation manual / Spacer set / Power cable



## Pioneer in total security solutions for software and hardware

### Orient Computer Co., Ltd. (formerly Orient Instrument Computer Co., Ltd.)

Tokyo headquarters: Yamaguchi Bldg. 2F, 6-20-12, Nishi Shinjuku, Shinjuku-ku, Tokyo, 160-0023 Tel. 03-5339-9488, Fax 03-5339-9485

- Osaka headquarters: Crystal Tower 32F, 1-2-27 Shiromi, Chuo-ku, Osaka, 540-6032 (branch) Tel. 06-6966-1665, Fax 06-6966-1675
- North America branch: Suite 1500, HSBC Bldg., 885 W. Georgia St., Vancouver, BC, V6C 3E8, Canada Tel. +1-604-639-2142, Fax +1-866-698-8241
- Taiwan office: 4F, No. 20, Sec. 2, Nanjing E. Rd., Taipei, 104, Taiwan Tel. +886-2-2571-5100, Fax +886-2-2571-5101

Hong Kong branch: 35th Floor, Central Plaza, 18 Harbour Road, Wanchai, Hong Kong Tel. +852-2824-8127, Fax +852-2593-1222 -Actual products may differ from printed photos. -Specifications described in this catalog are subject to change without notice. -Printed descriptions are valid at the time of announcement and might differ

from actual details at the time of viewing